


ASSEMBLY INSTRUCTIONS

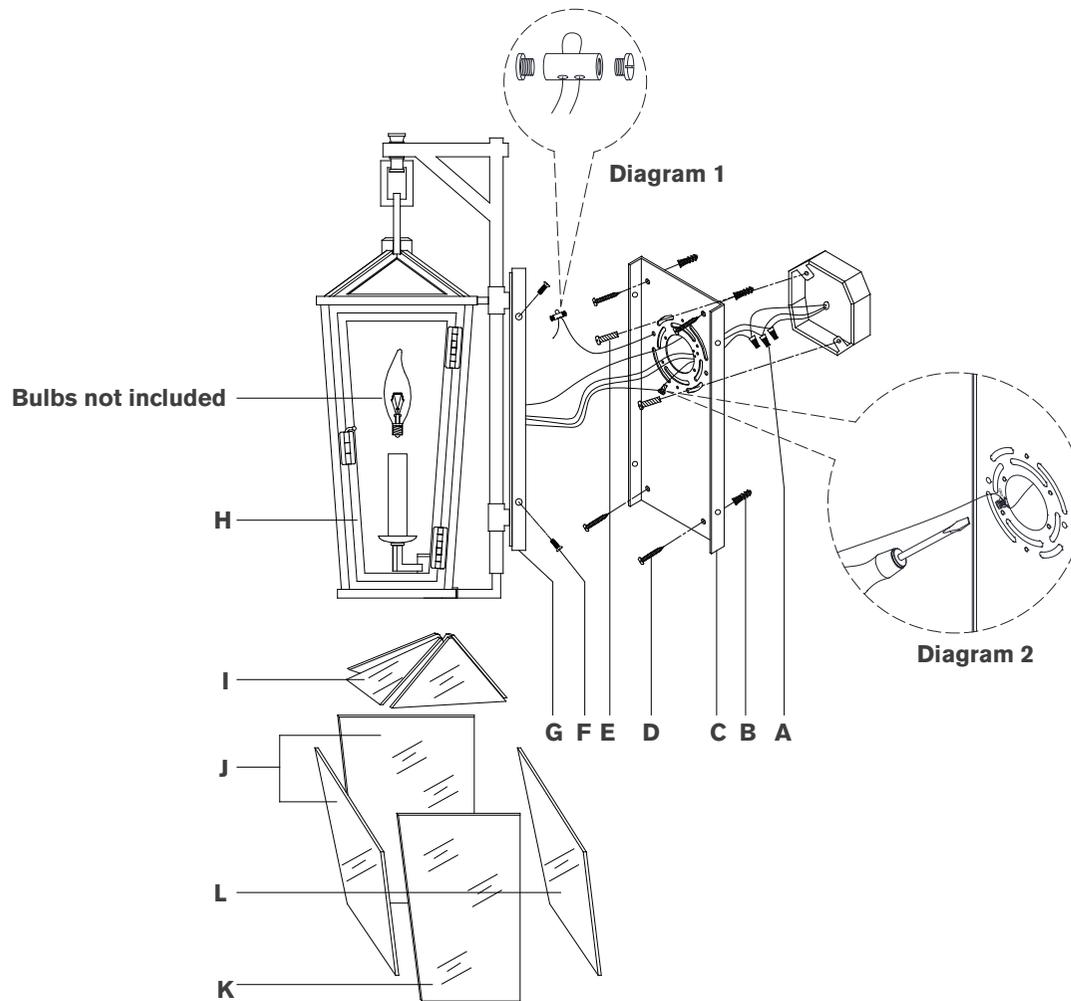

Darlana Tall Bracketed Wall Lantern

Item # CHO 2086

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Drill
Pencil	Hammer	

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove mounting plate **(C)** from backplate **(G)** by removing screws **(F)**.
- Using the mounting plate **(C)** as a guide, line up with the junction box and mark anchor positions.
- Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(B)** into the holes using hammer.
- Install mounting plate **(C)** to the junction box and secure with mounting screws **(E)**, then secure wood screws **(D)** to anchors **(B)**.
- Run support cable through hole on back of mounting plate **(C)**. Loosen cable lock and install to end of support cable. Insert other end of cable through the cable lock and tighten ends with a screwdriver to secure. (see diagram 1)
- Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 2). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(A)**.
- Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
- Connect fixture hot wire (black) to the supply hot wire (usually black) using the wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.

ASSEMBLY INSTRUCTIONS

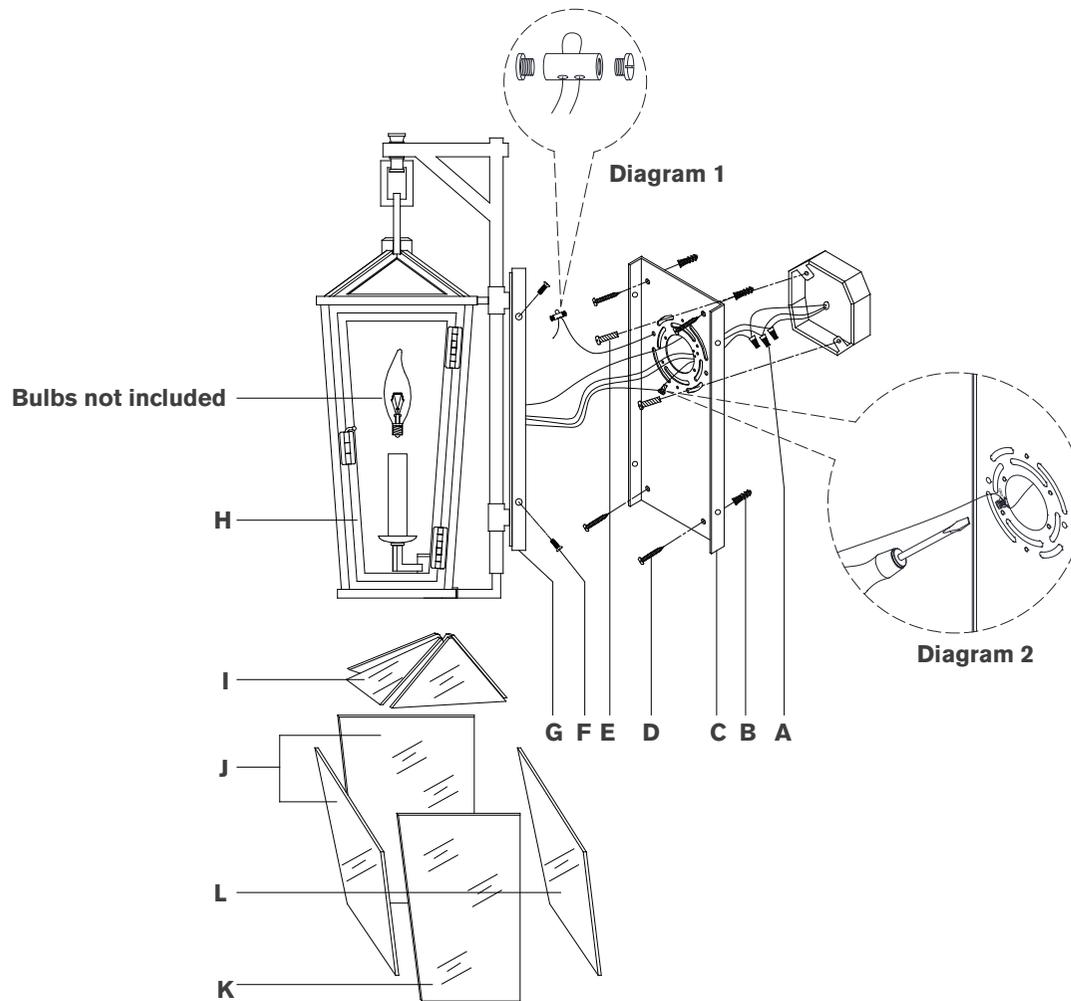

Darlana Tall Bracketed Wall Lantern

Item # CHO 2086

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Make sure all wire connections are tight and tuck into the junction box.
 11. Install backplate (**G**) to mounting plate (**C**) and secure with screws (**F**).
 12. Place glass panel (**L**) on the back of fixture frame (**H**) and secure it by bending the metal tabs.
 13. Place glass panels (**J**) on the side of fixture frame (**H**) and secure it by bending the metal tabs.
 14. Place glass panels (**I**) on the top of fixture frame (**H**) and secure it by bending the metal tabs.
- NOTE:** Rubber gasket on top glass must stay in place between glass and fixture frame in order for item to be properly protected from water. Do not remove.
15. Place glass panel (**K**) on the door of fixture frame (**H**) and secure it by bending the metal tabs.
 16. Install light bulbs into the sockets.

FOR OUTDOOR/WET LOCATION INSTALLATION:

17. Using silicon compound, apply small bead where backplate meets wall to prevent water from entering.
- NOTE:** Large gaps will need to be corrected before applying silicon compound.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.